

Tilt & Turn Window Hardware

NT - Specification




Tilt & Turn Window Hardware NT - Specification

- Suitable for PVC-U, aluminium and timber profiles
- Modular design suits all production requirements from manual to fully automated systems
- Patented clip & fit system facilitates fixing
- Guide plates on the cams add strength and prevent twisting under pressure
- Concealed and face-fixed hinge options
- Caters for a variety of window shapes and configurations
- Unique range of retro-fittable accessories to enhance performance
- Electronic drive options
- Suitable for severe weather conditions, i.e. high rise applications
- Renowned Roto tilt & turn quality and expertise
- Conforms to BS 7950
- Conforms to BS 6375
- Unique RotoSil Nano finish exceeds:
EN 1670:1998 Part 5.6 Class 5



The new hard wearing scissor-stay guide integrates both a tilt restrictor and anti-slam device. The sash is held in the tilted position, preventing gusts of wind from slamming the window shut. On installation the tilt depth can be adjusted to either 80 or 140mm.

NT clip-fit system

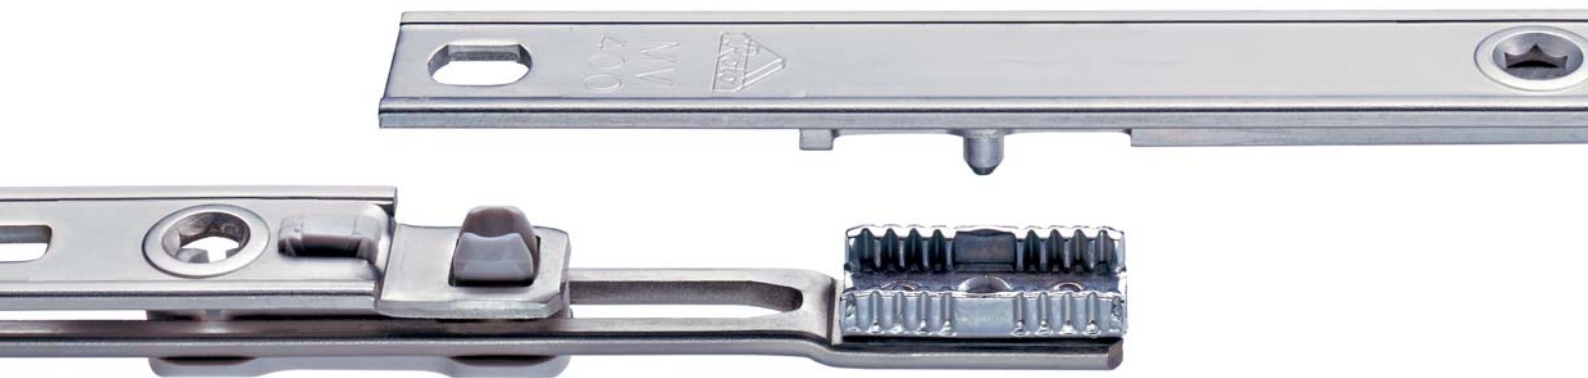

Roto Roof Windows and Hardware Ltd.

Swift Point
Rugby CV21 1QH
United Kingdom
Telephone +44 (0)1788 55 86 00
Facsimile +44 (0)1788 55 86 05
info.west@roto-frank.com
www.roto.co.uk